


HAM-LET MEDIA HEADER

HMH SERIES

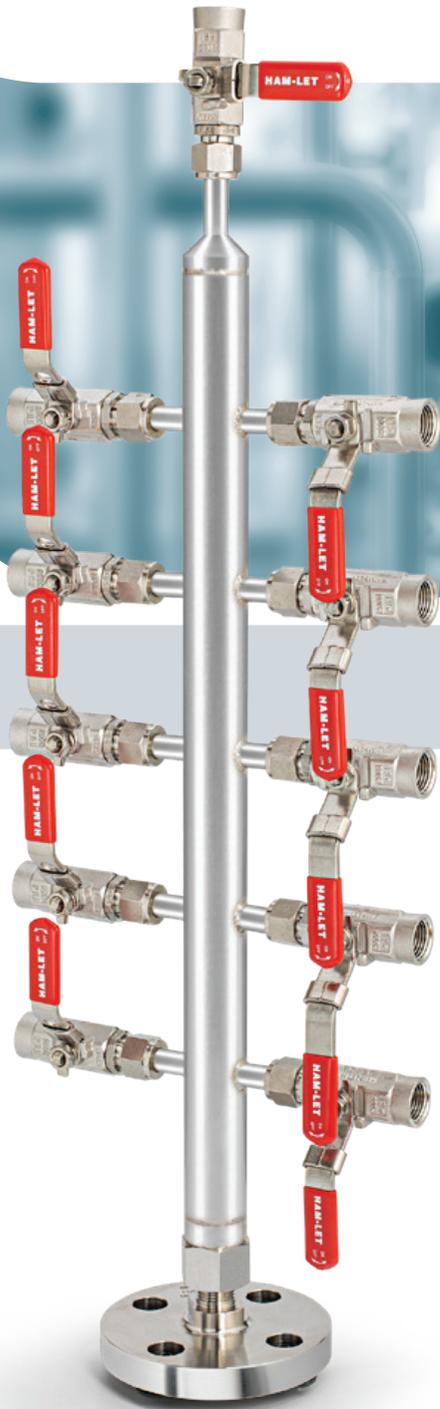

HMH FEATURES

- Welded body construction
- 316L Stainless Steel
- Modular design for maintenance and easy installation
- Maximum allowed working pressure 1000 psi (69 bar)
- Available in 1" and 2" manifold body
- Various types of valves
- Multiple choices of inlet and outlet types
- Up to 12 outlet distribution valves

MATERIAL OF CONSTRUCTION

No.	COMPONENTS	MATERIAL
1	Inlet (Valve, Fitting or Flange)	316 Stainless Steel
2	Adapter Inlet	316L Stainless Steel
3	Reducer	316L Stainless Steel
4	Pipe	316L Stainless Steel
5	Outlet Valve	H-800, H-700, H-500, H-300U
6	Adapter Outlet	316L Stainless Steel
7	Drain (Valve or Fitting)	316 Stainless Steel

TESTING

Standard testing for each Media Header includes testing with Nitrogen at 80 psig. Each Media Header is tested for leakage through the shell.

CLEANING & PACKAGING


Every Media Header is cleaned in accordance with Standard Cleaning and Packaging (procedure 8184).

GENERAL

The Media Headers are commonly used to distribute gas or liquid in various applications. It also allows multiple flow paths with various types of valves.

The design includes inlet, multiple outlets, and drain connection in the opposite side of the inlet.

The Media Header is made of welded pipe and outlets, with minimal potential for leak paths.

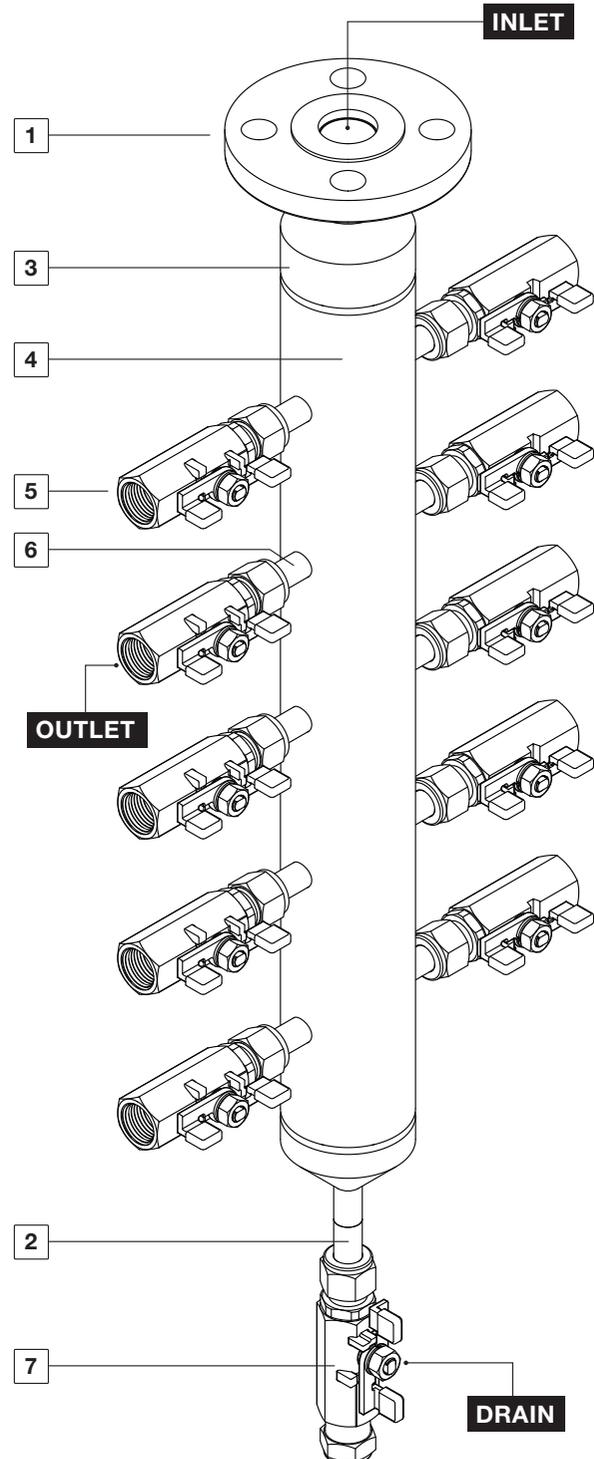

HAM-LET MEDIA HEADER ORDERING INFORMATION

Options

HMH		1 - 6 - 7		LK		4 - 7		LK		8 - 7		LK		4		-	
Valve Series		Inlet		Outlet		Outlet Connection		Drain Connection		Drain Size Connection		Drain Component					
Pipe Size		3	H-300U	8	H-800	LK	Let-Lok	LK	Let-Lok	4	1/4	P	Pressure Gauge				
1	1" SCH40	5	H-500	5	H-500	TS	Tube fitting	TS	Tube fitting	6	3/8	D	Dye penetration test for all welding				
2	2" SCH40	7	H-700	7	H-700	MP	Male NPT	MP	Male NPT	8	1/2	O	Valve on one side				
Number of Outlet*		8	H-800	3	H-300U	FP	Female NPT	FP	Female NPT	12	3/4						
6		F	Flange	L	Fittings	P	Plug	N1	NPS ANSI class 150	16	1"						
8		L	Fitting	Outlet Size Connection		Drain		P	Plug	6M	6MM						
10		Inlet Connection		4	1/4	3	H-300U			8M	8MM						
12		LK	Let-Lok	6	3/8	5	H-500			10M	10MM						
		TS	Tube fitting	8	1/2	7	H-700			12M	12MM						
		MP	Male NPT	12	3/4	8	H-800			16M	16MM						
		FP	Female NPT	16	1"	F	Flange			25M	25MM						
		N1	NPS ANSI class 150	6M	6MM	L	Fitting										
		P	Plug	8M	8MM												
		Inlet Size Connection		10M	10MM												
		4	1/4	12M	12MM												
		6	3/8	25M	25MM												